


:
 :

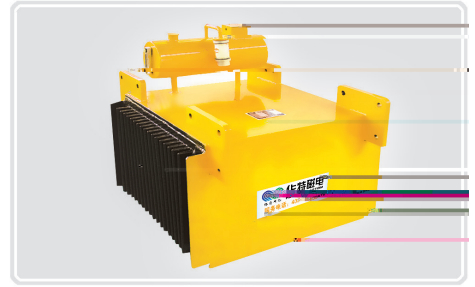

60

F

(5)

				m/s	kw	kg	mm					
							A	B	C	D	E	
RCDE- 6					125	1.5	650	830	835	940	770	610
RCDE- 6.5					150	2.0	750	880	890	1000	820	670
RCDE- 8					200	3	1150	1190	1090	1050	1000	840
RCDE- 10					250	4.5	1400	1410	1330	1650	1238	985
RCDE- 12					300	6	2780	1550	1450	1260	1400	1180
RCDE- 14					350	8.5	4200	1750	1700	1350	1600	1460
RCDE- 16					400	12.5	5700	1950	1850	1500	1700	1640
RCDE- 18					450	18	7300	2170	2050	1500	1900	1850

RCDE- T

		mm	h mm	mT	KW	mm			m/s	kg
						A	B	C		
RCDE- 6.5	T1	650	200	90	3.0	1050	990	940	5.8	950
	T2			120	5.0	1090	1030	970		1200
	T3			150	8.0	1090	1030	1000		1470
RCDE- 8	T1	800	250	90	5.0	1180	1120	1050		1570
	T2			120	9.0	1410	1330	1080		2000
	T3			150	13.0	1410	1330	1230		2470
RCDE- 10	T1	1000	300	90	7.5	1410	1330	1250		2430
	T2			120	12.5	1550	1450	1250		3090
	T3			150	16.5	1550	1450	1350		3850
RCDE- 12	T1	1200	350	90	10.0	1600	1480	1250	3500	
	T2			120	14.0	1750	1700	1350	4550	
	T3			150	21.0	1750	1700	1420	5640	
RCDE- 14	T1	1400	400	90	14.0	1780	1720	1350	4950	
	T2			120	18.0	1950	1850	1420	6990	
	T3			150	26.0	1950	1850	1480	7940	
RCDE- 16	T1	1600	450	90	15.0	1980	1860	1350	6770	
	T2			120	22.0	1980	1860	1430	8720	
	T3			150	32.0	2170	2050	1350	10820	
RCDE- 18	T1	1800	500	90	19.0	2170	2050	1420	9000	
	T2			120	28.0	2170	2050	1540	11790	
	T3			150	38.0	2350	2300	1420	14800	

()

